


# REFINE<sup>®</sup>

A SPRAY GUN REFINED OVER 45YS TECHNOLOGY

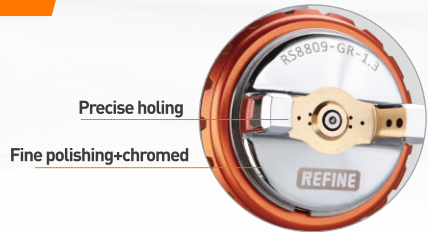

## RS8809

### PROFESSIONAL HIGH-EFFICIENT BASECOAT /CLEARCOAT SPRAY GUN

- German atomization engineering and quality standard.
- Unified fine atomization and wet core are ensuring excellent coverage of paint and leveling thus increasing spray efficiency.
- High quality stainless nozzles tip, needle, air cap and springs are processed state-of-the-art Five-axis CNC technologies ensuring precision and longevity.
- Ergonomic design and non-stick matt chromed finishing create user-friendly hand feeling and easy cleaning.
- The cup is made of POM materials; and all gaskets are solvent-resistant PTFE materials.
- Streamlined body design makes it more cost-effective and lightweighted while sustaining quality and performance.



#### TECHNICAL DATA

Model	RS8809GR	RS8809GH
Atomization technology	LVMP	HVLP
Recommended spray pressure	0,5-2,5bar	0,5-2,5bar
Optimum spray pressure	2.0-2.5bar	2.0bar
Standard nozzle size	1.3mm	1.3mm
Spraying distance	17-21CM	10-17CM
Air consumption	285L/min	385L/min
Pattern length	280-290mm	270mm
Paint cup size	600ml	600ml
Transfer rate	>65%	>65%
Atomized particle	20-40um	30-40um
Package:10pcs/68*34*24.5cm, NW/GW: 9.5/10.5KGS		

